


Application

Wheel spacers are used to maintain proper spacing between reinforcing bars and the concrete form

They ensure consistent concrete cover, enhancing the durability and strength of structures

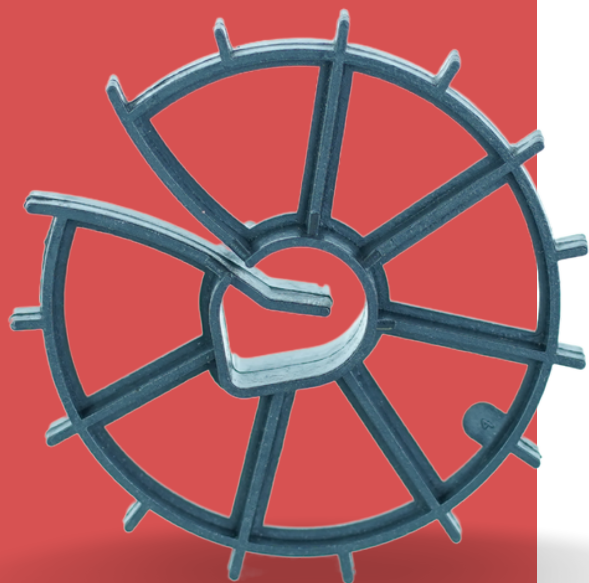

Wheel Spacers

Technical Specification

Techmarkets manufactures a variety of Wheel Spacers to accommodate a **range of bar sizes** and concrete cover

Made from **Reprocessed Polypropylene (PP51)** this thin, radial design ensures accurate, multi-directional positioning with minimal contact area to the formwork

*This is a **stock item** available for immediate delivery*

Pack Quantities

Product Code	Product Name	Bar Diameter	Cover	Pack Quantity
20250	15NW12	4mm to 12mm	15mm	Pack of 2,000
20251	20NW12	4mm to 12mm	20mm	Pack of 1,000
20252	25NW12	4mm to 12mm	25mm	Pack of 1,000
20254	30NW12	4mm to 12mm	30mm	Pack of 500
20236	35NW12	4mm to 12mm	35mm	Pack of 500
20256	40NW12	4mm to 12mm	40mm	Pack of 500
20258	50NW12	4mm to 12mm	50mm	Pack of 250
20253	25NW20	8mm to 20mm	25mm	Pack of 500
20255	30NW20	8mm to 20mm	30mm	Pack of 500
20237	35NW20	8mm to 20mm	35mm	Pack of 125
20257	40NW20	8mm to 20mm	40mm	Pack of 250
20259	50NW20	8mm to 20mm	50mm	Pack of 250
20260	60NW28	12mm to 28mm	60mm	Pack of 100

Contact Us



0161 876 4125



office@techmarkets.co.uk



4th Ave, Trafford Park, M17 1DB