


Application

De Bonding sleeves are fitted to flat strip connecting ties to allow for movement, whilst supporting horizontal and vertical loading

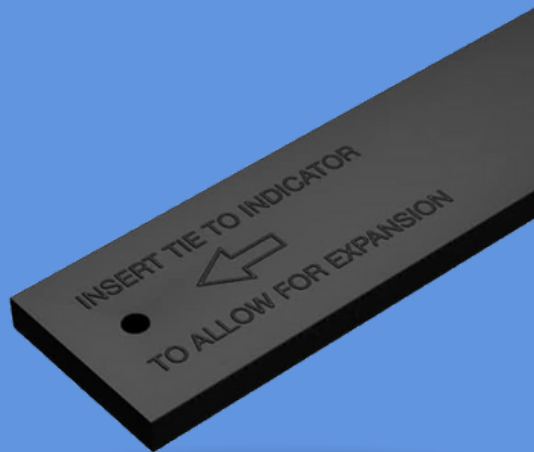

De-Bonding Sleeves

Technical Specification

Our De-Bonding Sleeves are manufactured from **High-Melt Polypropylene** with additives to ensure free movement as required.

To allow for **thermal movement** of a structure, it is necessary to isolate the bond on one half of connecting ties.

Techmarkets have patented the indicator De-Bonding Sleeve which allows for movement in both **expansion** and **contraction**.

*This is a **stock item** available for immediate delivery*

Pack Quantities

DBS are sold in inner bags of 250 and outer bags of 1,000pcs

Product Code	Tie Width	Sleeve Length	Outer Bag Quantity
20021	20mm	50mm	1,000 (4 inner bags)
20022	20mm	100mm	1,000 (4 inner bags)
20023	20mm	120mm	1,000 (4 inner bags)
20024	20mm	150mm	1,000 (4 inner bags)
20025	20mm	200mm	1,000 (4 inner bags)
20029	25mm	50mm	1,000 (4 inner bags)
20031	25mm	100mm	1,000 (4 inner bags)
20032	25mm	120mm	1,000 (4 inner bags)

Contact Us



0161 876 4125



office@techmarkets.co.uk



4th Ave, Trafford Park, M17 1DB